

GenGard* GN8020

alkaline cooling water treatment

- Controls deposition and scale with patented technology
- Stable in presence of halogens
- Maximizes protection against deposition
- Minimizes or eliminates acid feed


description and use

GenGard GN8020 is a blend of deposit control agents designed to prevent both scale formation and particulate fouling in open recirculating cooling water circuits. The product combines a unique Alkaline Enhanced Chemistry (AEC) for calcium carbonate control with a Stress Tolerant Polymer (STP) to provide complete deposition control for highly supersaturated alkaline waters operating at pH >7.8. GenGard GN8020 should be applied with a corrosion inhibitor treatment to ensure total system protection.

SUEZ's Alkaline Enhanced Chemistry is a major breakthrough in calcium carbonate scale control. AEC allows high cycles of concentration to be achieved while maintaining heat transfer efficiency. AEC is the only effective non-phosphorus calcium carbonate inhibitor for alkaline pH operation.

Unlike conventional phosphonate deposit control additives, AEC and STP are completely halogen stable. Phosphonates are susceptible to break-down in the presence of halogen (chlorine and bromine), leading to loss of calcium carbonate inhibition. The superior stability of AEC and STP allows halogen disinfectants to be effectively utilized to maintain system cleanliness and to control Legionella bacteria.

AEC and STP ensure complete deposition control under the most stressful conditions of temperature, flow and water chemistry. The performance of the AEC/STP dispersant package is unmatched by conventional phosphonate/polymer programs.

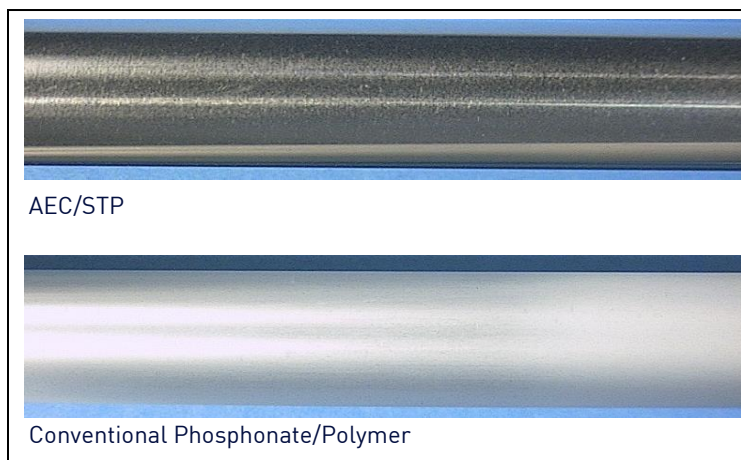

Calcium carbonate deposition studies under heat transfer conditions at 135°F (57°C), pH 8.6, 600 ppm Ca Hardness and LSI 2.5 for 6 Days.

treatment and feeding requirements

Proper treatment levels for GenGard GN8020 depend on many factors such as the potential scaling conditions particular to a given installation. This product should be used in accordance with control procedures that SUEZ establishes for a specific application and requires either phosphate from the makeup water or a supplemental inhibitor feed for mild steel corrosion protection. Systems containing copper or copper alloys would require the addition of an azole. GenGard GN8020 should be fed to a point in the cooling system where it rapidly mixes with the bulk cooling water.

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

*Trademark of SUEZ; may be registered in one or more countries.

©2017 SUEZ. All rights reserved.

For best results, GenGard GN8020 should be fed neat (undiluted). Dilutions, if necessary, should only be made with low hardness water.

The feed of GenGard GN8020 is controlled either by a simple and accurate grab sample test or continuously with an on-line monitor. Tanks, pumps, piping, and valves should be made of stainless steel, polyethylene, or PVC.

general properties

Physical properties of GenGard GN8020 are shown on the Material Safety Data Sheet, a copy of which is available on request.

packaging information

GenGard GN8020 is a liquid blend, available in a wide variety of customized containers and delivery methods. Contact your SUEZ representative for details.

storage

Store GenGard GN8020 at moderate temperatures and protect from freezing. If frozen, thaw completely and mix thoroughly prior to use.

safety precautions

A Material Safety Data Sheet containing detailed information about this product is available upon request.